

## EB同轴自吸式耐酸碱泵浦

EB coaxial selfpriming acid alkali resistant pump

使用说明书



**浙江久江泵业有限公司**  
Zhejiang Jiujiang Pump Industry Co. LTD

## 公司简介

# COMPANY PROFILE

浙江久江泵业有限公司是专业从事自吸泵、排污泵、管道泵、隔膜泵、螺杆泵、多级泵等各类水泵及附属产品生产和销售的企业。

公司落座于具有“泵阀之乡”美称的温州瓯北，与市区隔江相望，甬台温、金丽温高速贯穿市中心；到火车站仅需20分钟车程，至机场不到1小时，交通十分便利，资讯发达。


企业自成立以来，充分的利用区域性专业集群优势，大力开发科技创新。多年来公司积国内水泵优秀企业的技术、人才、管理等资源优势，进行有效合理的整合，并辅以现代企业管理模式、科学高效的公司管理体制制度，通过近几年的快速发展，依靠雄厚的科技实力和扎实的管理基础，通过ISO9001-2000国际标准质量体系认证。

久江人通过“专注科技成就恒久品牌、专业技术造就长久品质、专心服务创造永久口碑”的宗旨，坚持诚信经营，在强手如林的泵阀行业占据了一席之地。




# 产品目录 | Product Contents

● 材质构造图 .....	01
● 型号识别 .....	02
● 规格表 .....	02
● 性能曲线图 .....	03
● 外形尺寸图 .....	03

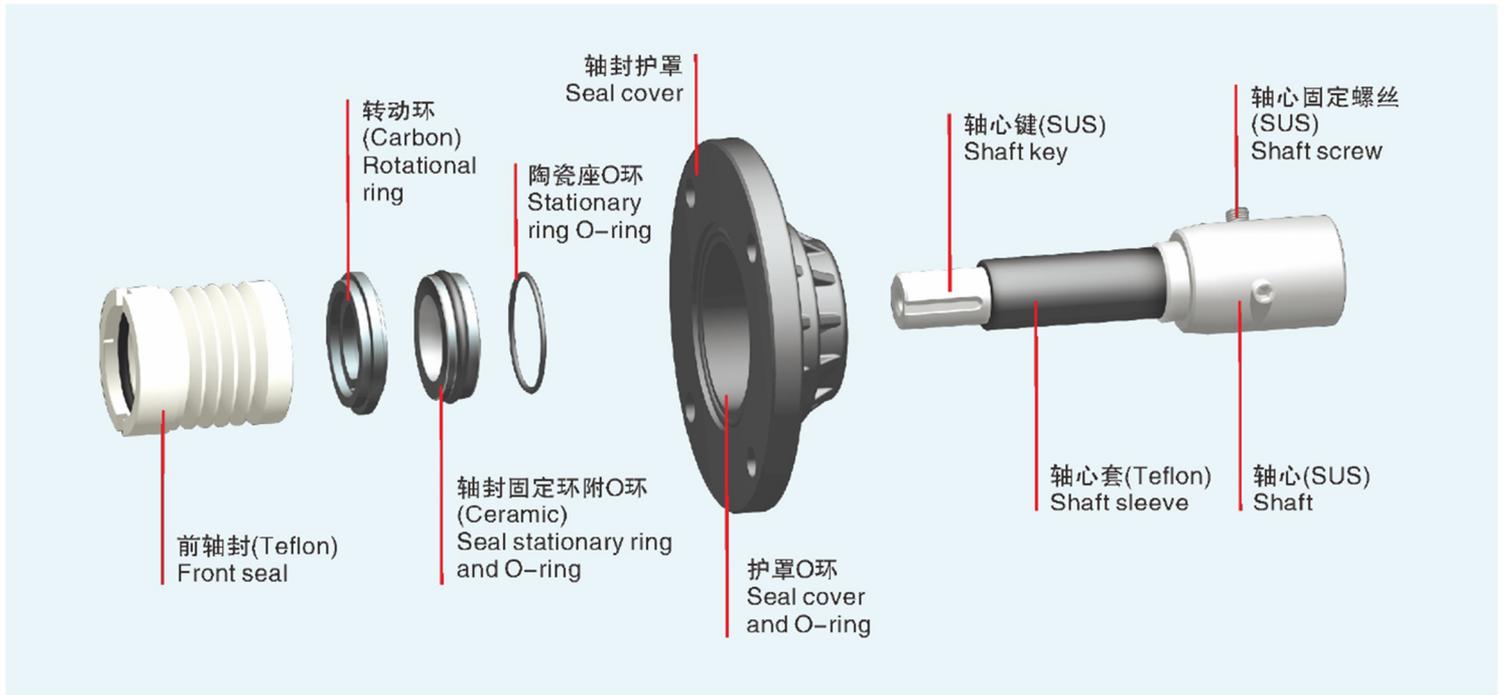

## 材质构造图 Material

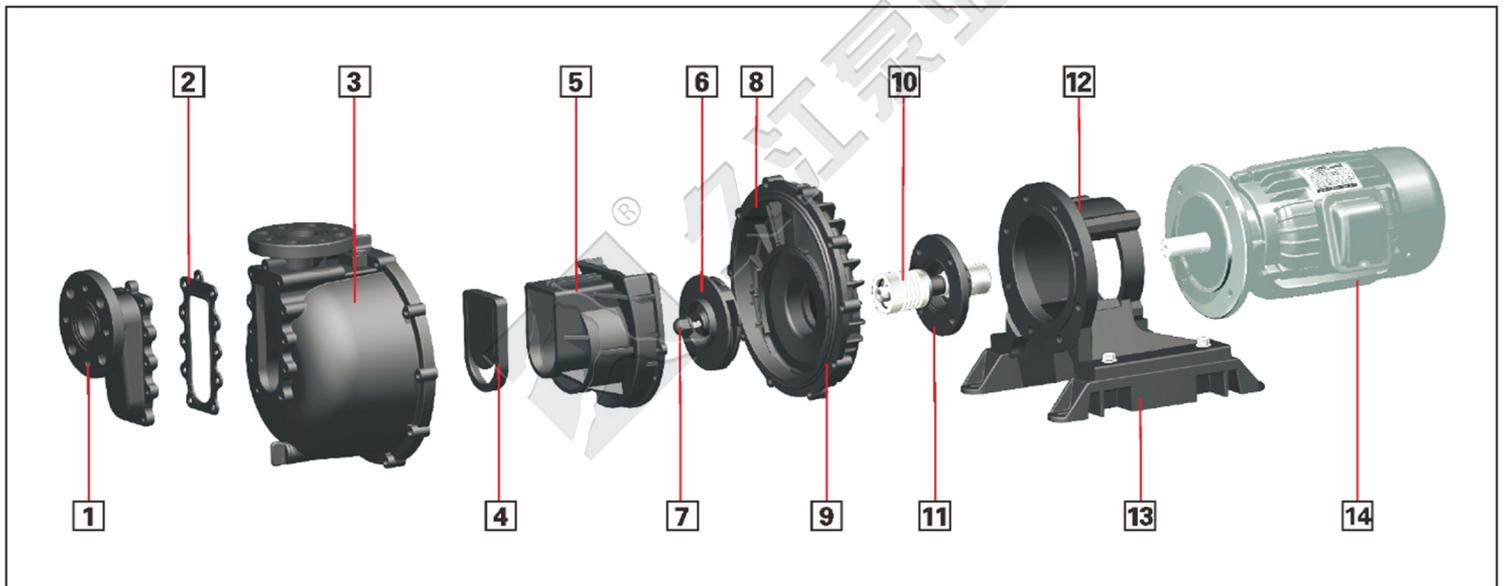

编号 NO.	名称 Description	
1	自吸筒 Self-priming barrel	FRPP/ CFRPP/ CPVC/ PVDF
2	自吸筒垫片 Self-priming packing	NBR/ EPDM/ VITON
3	主体 Main body	FRPP/ CFRPP/ CPVC/ PVDF
4	单向阀 Check valve	NBR/ EPDM/ VITON
5	中封盖 Check cover	FRPP/ CFRPP/ CPVC/ PVDF
6	叶轮 Impeller	FRPP/ CFRPP/ CPVC/ PVDF
7	叶轮固定螺丝 Impeller screw	FRPP/ CFRPP/ CPVC/ PVDF
8	封盖O环 Rear cover O-ring	NBR/ EPDM/ VITON
9	后封盖 Rear cover	FRPP/ CFRPP/ CPVC/ PVDF
10	前轴封 Front seal	NBR/ EPDM/ VITON
11	后轴封 Back seal	FRPP/ CFRPP/ CPVC/ PVDF
12	脚座 Base frame	FRPP
13	脚架 Frame	FRPP
14	马达 Motor	

## 型号识别 Model identification



EB - 40 02 2 N B H C C - H 6

① 系列代码 Series Symbol	EB: FRPP EB-C: CFRPP EB-A: CPVC EB-P: PVDF	⑥ 单向阀 Check Valve	B-无舌单向阀(入口比液位低选用) No tongue check valve ( Inlet lower than liquid level ) A-有舌单向阀(入口比液位高选用) Have tongue check valve (Inlet higher than liquid level)
② 出入口口径 In-Outlet size	40: 1 1/2" 50: 2" 75: 3"	⑦ 扬程 Head	L-标准扬程 Standard head H-高扬程 High head
③ 马力 Motor Power	11: 1Ø, 1/2HP 13: 3Ø, 1/2HP 01: 3Ø, 1HP 02: 3Ø, 2HP 03: 3Ø, 3HP 05: 3Ø, 5HP	⑧ 固定环 Stationary Ring	C-CERAMIC(陶瓷) S-SIC(碳化矽)
④ 极数 Pole	2: 2P 4: 4P	⑨ 转动环 Rotational Ring	C-CARBON(碳素) S-SIC(碳化矽)
⑤ 橡胶材质 Rubber Material	N: 丁腈橡胶NBR E: 三元乙丙EPDM V: 氟橡胶VITON G: GFRPP	⑩ 弹簧 Mechanical Spring	H-HASTELLOY-C S-SUS316
		⑪ 频率 Frequency	5: 50HZ 6: 60HZ


## 规格表 Specifications

型号 Model	曲线号码 Curves NO	全扬程 Total head (m)	全流量 Total capacity (L/min)	扬程 Head (m)	流量 Flow amount (L/min)	入口+出口 (口径) In/out diameter (mm)	动力Power			重量 Weight (Kg)
							相数 Phase	极数 Charge	马力 Power	
<b>Frequency: 50HZ</b>										
EB-40011L	B	7	185	5	135	40/40	1Ø	4	1/2	
EB-40012L	A	13	240	6	220	40/40	3Ø	2	1	
EB-40013L	B	7	185	5	135	40/40	3Ø	4	1/2	
EB-40014L	C	7	210	5	150	40/40	3Ø	4	1	
EB-40022L	D	17	280	10	215	40/40	3Ø	2	2	
EB-40022H	E	19	300	12	230	40/40	3Ø	2	2	
EB-50032L	F	17	410	12	300	50/50	3Ø	2	3	
EB-50032H	G	23	390	14	300	50/50	3Ø	2	3	
EB-50052H	H	26	450	15	400	50/50	3Ø	2	5	
EB-75052H	I	27	800	20	430	75/75	3Ø	2	5	
<b>Frequency: 60HZ</b>										
EB-40011L	B	7.5	200	5	150	40/40	1Ø	4	1/2	
EB-40012L	A	16	240	10	150	40/40	3Ø	2	1	
EB-40013L	B	7.5	200	5	150	40/40	3Ø	4	1/2	
EB-40014L	C	9	270	6	240	40/40	3Ø	4	1	
EB-40022L	D	18	300	10	230	40/40	3Ø	2	2	
EB-40022H	E	22	330	12	230	40/40	3Ø	2	2	
EB-50032L	F	21	430	12	300	50/50	3Ø	2	3	
EB-50032H	G	29	480	18	300	50/50	3Ø	2	3	
EB-50052H	H	34	600	20	400	50/50	3Ø	2	5	
EB-75052H	I	35	860	20	580	75/75	3Ø	2	5	

## 性能曲线图 Performance curves

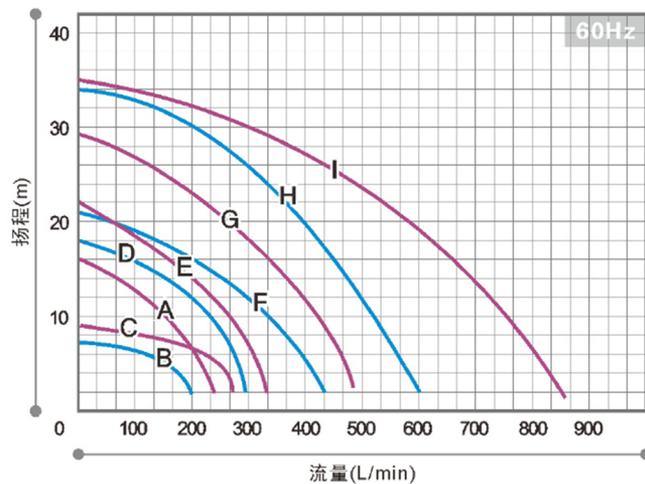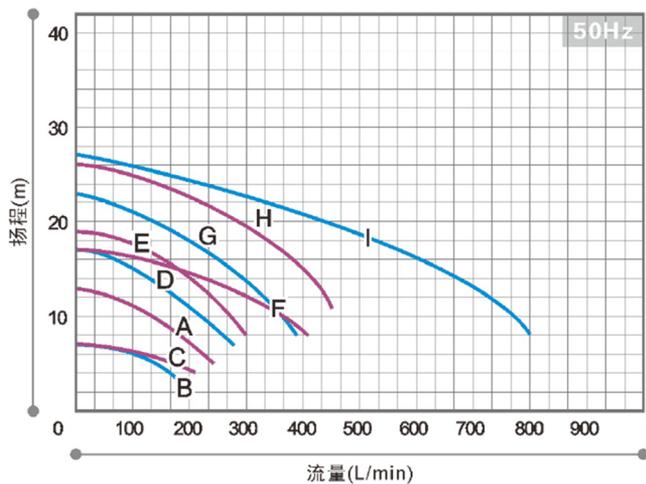

## 外形尺寸图 Dimensional drawing, part drawing

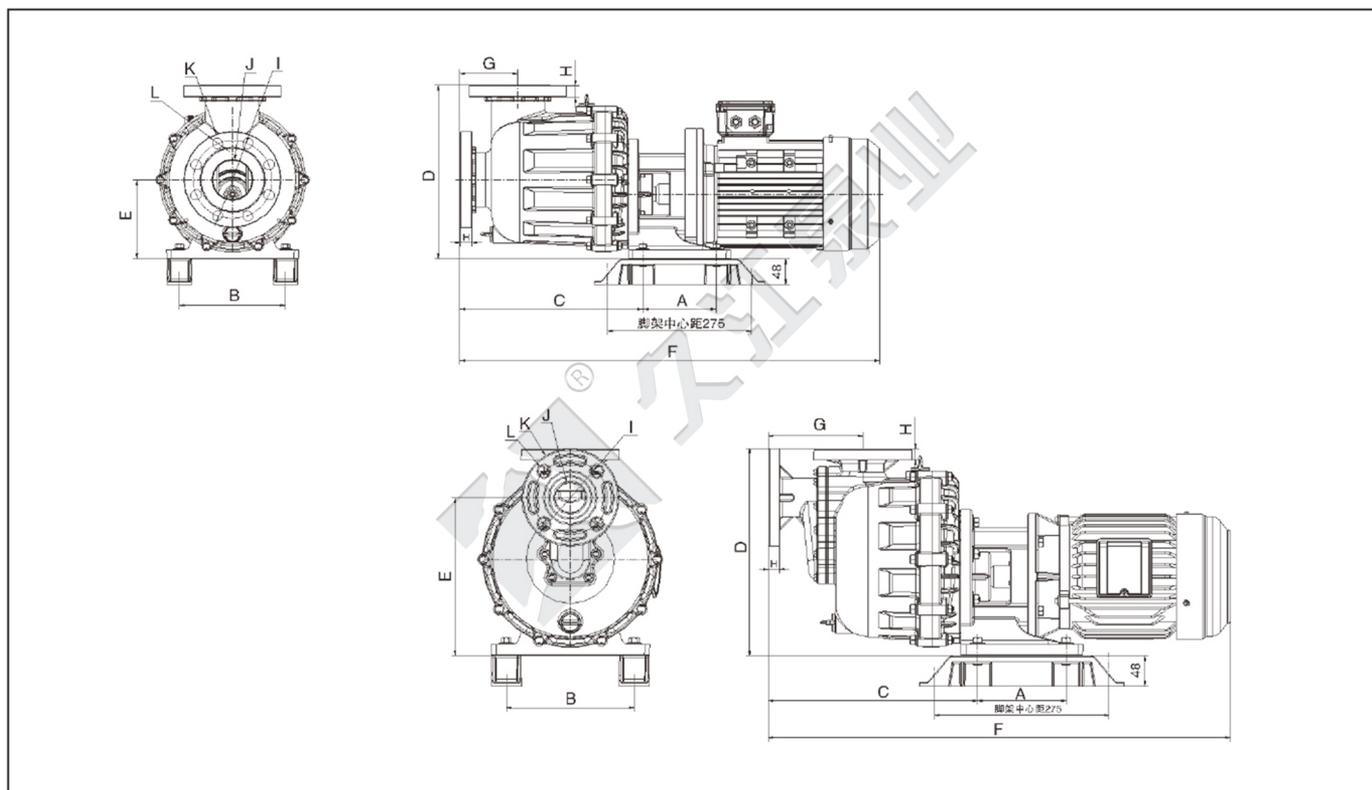

型式Type	A	B	C	D	E	F	G	H	I	J	K	L
EB-40011L	140	202	330	327	250	650	149	18	103	∅40	∅138	∅20
EB-40012L	140	202	330	327	250	650	149	18	103	∅40	∅138	∅20
EB-40013L	140	202	330	327	250	650	149	18	103	∅40	∅138	∅20
EB-40014L	140	202	330	327	250	650	149	18	103	∅40	∅138	∅20
EB-40022L	140	202	330	327	250	730	149	18	103	∅40	∅138	∅20
EB-40022H	140	202	330	327	250	730	149	18	103	∅40	∅138	∅20
EB-50032L	140	202	330	327	250	730	149	18	118	∅50	∅155	∅20
EB-50032H	140	202	330	327	250	730	149	18	118	∅50	∅155	∅20
EB-50052H	140	202	330	327	250	765	149	18	118	∅50	∅155	∅20
EB-75052H	140	202	330	333	152	800	110	22	150	∅75	∅185	∅20

本公司所述产品资料以实物为准。若有变更，恕不另行通知。本公司拥有最终解释权

The product information of the company is subject to the physical object. Subject to change without prior notice  
The company reserves the right of final interpretation.

本画册采用生态纸印刷。珍惜资源，善待环境

This album is printed on ecological paper. Cherish resources and be kind to the environment

注：保留产品技术更改权力

Note: Reserve the right of technical change of products



**浙江久江泵业有限公司**

地址：浙江省温州市瓯北街道东瓯工业区林五路

电话：0577-67279006 0577-67162006

传真：0577-67038006

网站：<https://www.jjby99.com>

邮箱：499424936@qq.com



公司官网



公司样本